
How do I save or load a config file in N2KView?

697 Ron De Pastino May 2, 2019 MBB100(Discontinued), MBB200C (Discontinued), MBB200C(Discontinued), MBB300C, MBB300C, N2KView, N2KView, TSM1330(Discontinued), TSM1330(Discontinued), TSM1330C (Discontinued), TSM1330C (Discontinued), TSM800(Discontinued), TSM800(Discontinued), TSM800C, TSM800C (Discontinued), TSM810C 0 15.65K


Saving a N2KView config file to a USB device.

1. Insert a USB flash drive into an available USB port on your device.

2. From the main screen, tap to reveal the available tabs and select **Commands and Settings** on the right.

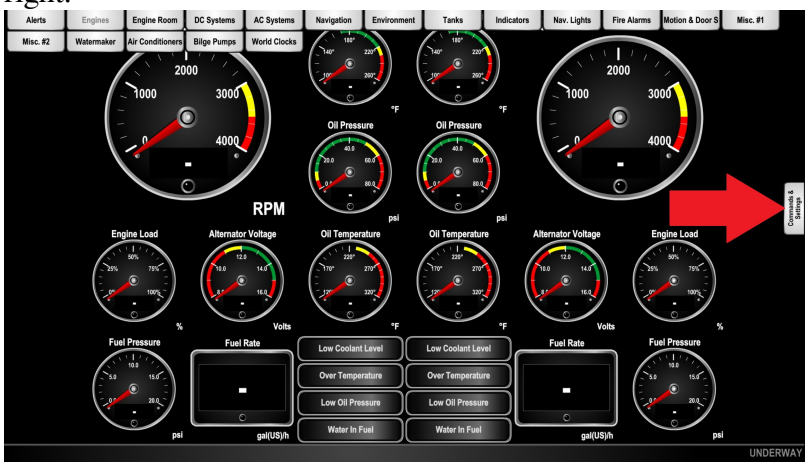


3. Select tab labeled **Configuration**.

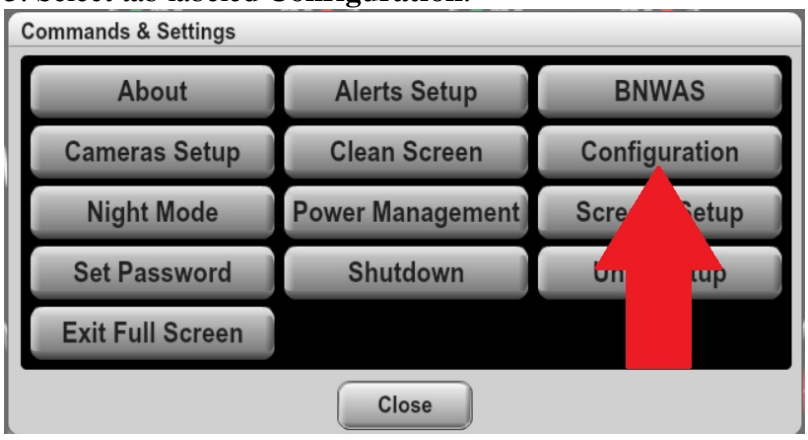

4. Select tab labeled **Save Configuration**.



5. Select the **Removable Disk** radial button, label the file (recommend putting the date), then click **Save**.

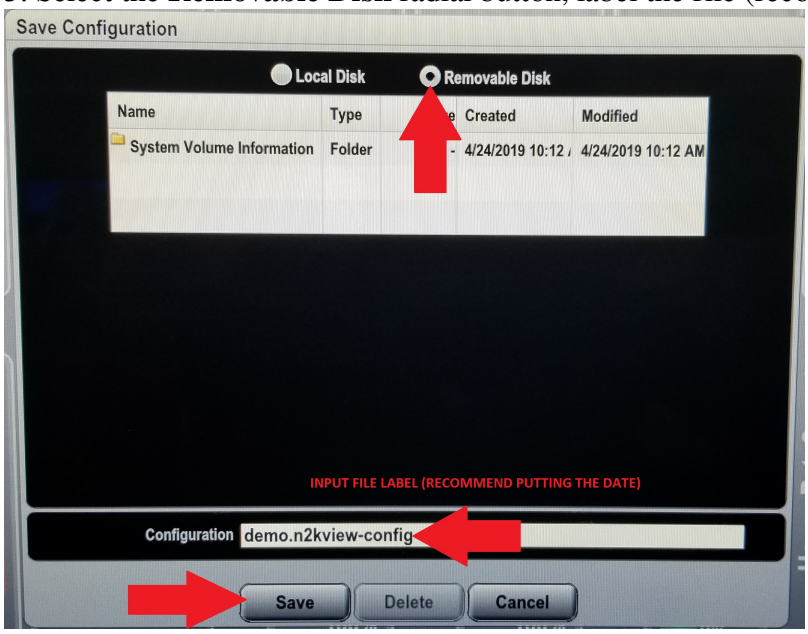


6. After a few moments, you will return back to the main screen.
Your file has been saved to the USB drive successfully.


Loading a N2KView config file from a USB device.

1. Insert a USB flash drive into an available USB port on your device.

2. From the main screen, tap to reveal the available tabs and select **Commands and Settings** on the right.

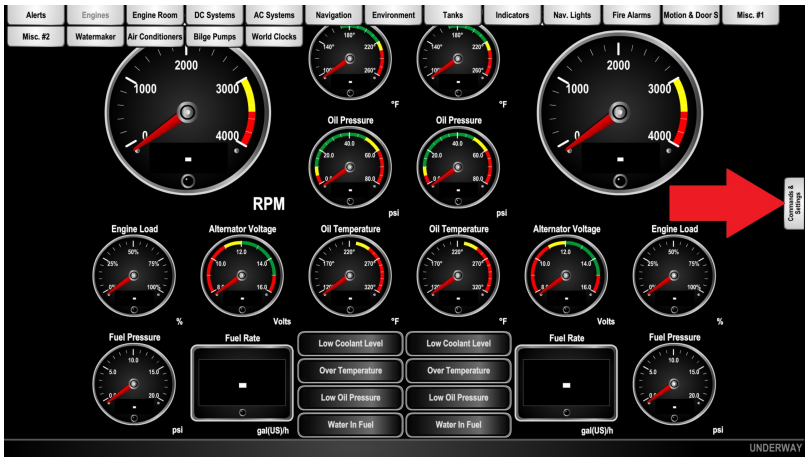


3. Select tab labeled **Configuration**.

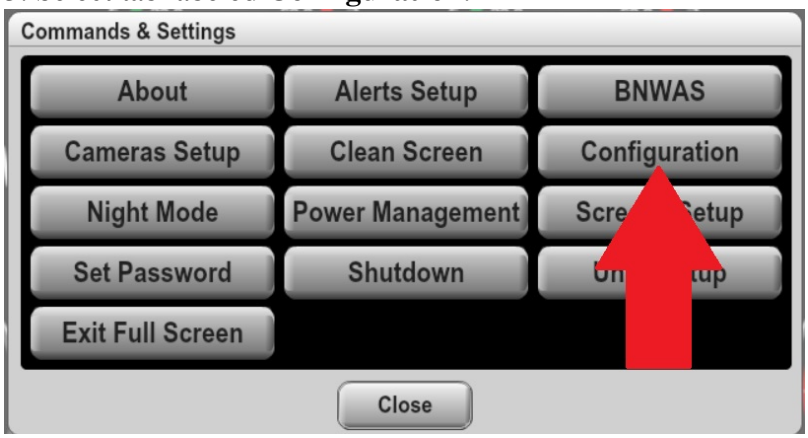


4. Select tab labeled **Load Configuration**.



5. Select the **Removable Disk** radial button, locate the saved configuration file on the USB drive, then click **Load**.

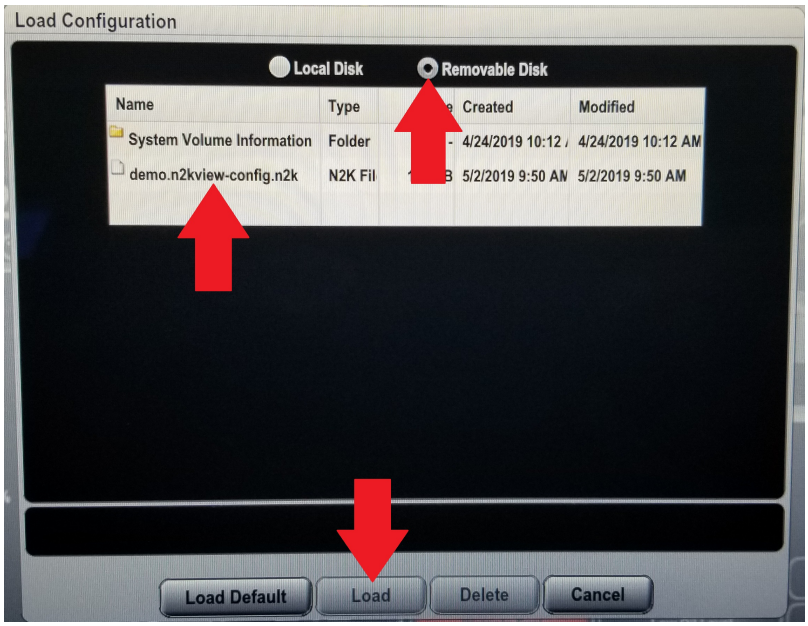

6. You will be prompted that this configuration file will now replace your current configuration. Select **OK** to confirm the change.

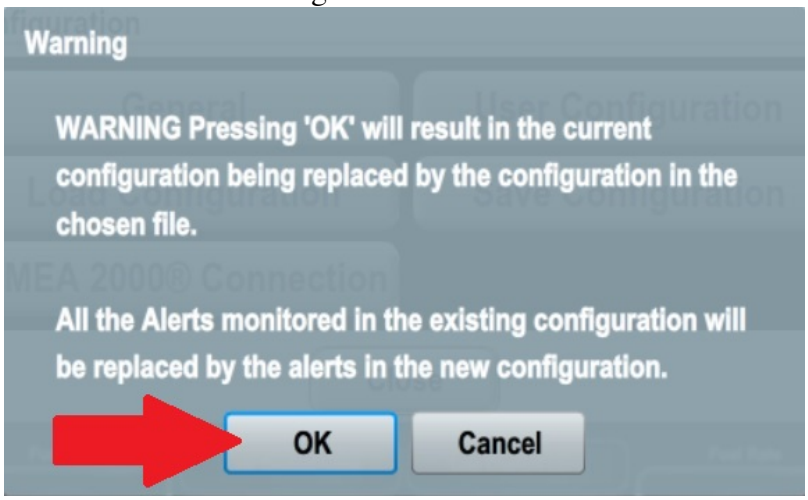

7. After a few moments, you will return back to the main screen.
Your file has been loaded from the USB drive successfully.
Please remove the USB drive from the device.

Online URL: https://maretron.com/wp-content/phpkbv96/article.php?id=697